

T1/E1 Redundancy Controller

TC8611

- **1+1 Redundancy over Primary and Secondary T1/E1 lines**
- **Extreme Temp (-40°C to +80°C) Optional**
- **Built-in Power Redundancy**
- **Meets or Exceeds IEC 61850-3, IEEE1613 & NEMA TS-2 Standards**
- **Member of the Mini Channel Bank Product Family**



TC8611 T1/E1 Redundancy Controller

The TC8611 T1/E1 Redundancy Controller adds 1+1 redundancy for an existing TDM Telecom infrastructure. It duplicates the incoming host T1/E1 signal and transmits the signal over the primary and secondary T1/E1 lines. Receiving on the primary and secondary lines, the TC8611 decides which T1/E1 signal between the two lines to transmit out to the host T1/E1.

TC8611 can be used along with TC3845-1 T1/E1-over-IP Gateway to allow one path to be over an Ethernet network while the other over a normal TDM connection.

The TC8611 interface card can fit into any available Mini Channel Bank housing option including 1S Standalone chassis and 1U/4U card cages.


Power Redundancy is standard and power supply options available for standalone version are 90-260VAC, 12VDC, 24VDC and -48VDC. Standard operating temperature is -20°C to +70°C and the extreme temperature version is -40°C to +80°C.



Applications

The TC8611 is designed for networks that need T1 redundancy.

These networks have a primary and redundant secondary line typically used in critical communication applications like public transportation, police and fire, emergency response, and power utilities.

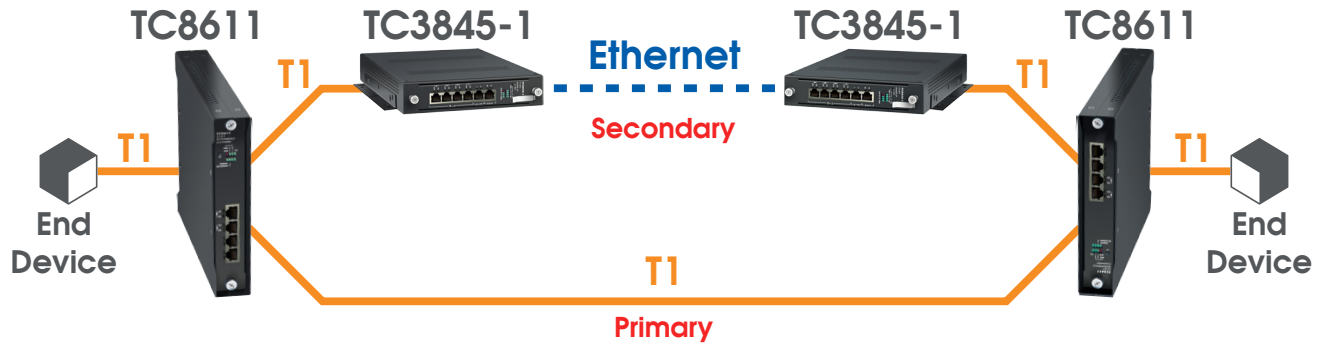

Typical Application using TC8611 T1/E1 Redundancy Controller

Electrical

T1 Interface

- Connector Electrical, RJ-48
- Line Termination ... 100Ω, balanced
- Data Rate 1.544Mbps
- Line Code AMI, B8ZS

E1 Interface

- Connector Electrical, RJ-48
- Line Termination . 120Ω (balanced),
..... 75Ω (unbalanced) via RJ-48
to BNC adapter cable
- Data Rate 2.048Mbps
- Line Code AMI, HDB3

System

- Bit Error Rate..... 1 in 10⁹ or Better

Regulatory Approval

- CE, FCC Part 15, CISPR (EN55022)
- CLASS A, IEC 61850-3, IEEE 1613,
- NEMA TS-2

LEDs

- ALM, PWR A, PWR B, Vcc, SIG, AIS,
- BPV, LB

Power

- Standard 12VDC
- Optional..... 24, -48 VDC
- 90-260 VAC, 50/60Hz
- Power Consumption <10W

Operating Temperature

- High Temp -20°C to 70°C
- Extreme Temp -40°C to 80°C

Storage

- Temperature..... -40°C to 90°C
- Humidity..... 95% non-condensing

Physical (Standalone Unit)

- Height..... (3.53 cm) 1.40"
- Width..... (18.14 cm) 7.20"
- Depth..... (24.89 cm) 9.80"
- Weight..... (907 g) 2.0 lbs



SAI GLOBAL
ISO 9001
Quality

TC Communications, Inc.
17881 Cartwright Road
Irvine, CA 92614 U.S.A.
Factory Tel: (949) 852-1972
Fax: (949) 852-1948

Web Site: www.tccomm.com

Note: Information contained in this data sheet is subject to change without prior notice.